

flow-captor 412x.8xM S140

The **flow-captor** type **412x.80/.81M** is a family of compact, precise metering flow switches with analog display in a rugged stainless steel housing. Its functionality is based upon the calorimetric principle. The flow-captor allows to set an exact flow set-point and will display simultaneously the flow rate up to the lowest flow conditions.




- precise switching flow monitor for water or oil based solutions up to 100 bar
- high accuracy also under low flow conditions
- separate adjustment for „range“ and „set-point“
- analog display of actual flow rate and display of adjusted set-point value
- LED display for output status
- **ISO 9001:2015**

Technical Data		
Typ	4120.8xM S140	4121.8xM S140
Medium	water-based solutions	oil-based solutions
Sensor Data *1		
Measuring range	0-20 cm/s to 0-300 cm/s, cont. adjust	0-30 cm/s to 0-300 cm/s, cont. adjust
Set-point range	approx. 15% - 90% of measuring range setting	
Medium temperature	- 20°C to + 80°C	
Ambient temperature	- 20°C to + 70°C	
Pressure	max. 100 bar (1000 Kpa)	
Response time	2s - 10s, according to range setting	2s -15s, according to range setting
Linearity deviation	< 5% ¹⁾	< 5% ²⁾
Repeatability	< 2%	
Hysteresis	approx. 10%	
Mechanical Data		
Protection class	IP67	
Material housing	stainless steel AISI 303	
Material of sensor probe	stainless steel AISI 303; (A: AISI 316Ti; B: Titanium; C: Hastelloy® C4; or D: Hastelloy® C22 on request)	
Thread	G ½" BSP alt. ½" - 14 NPT	
Housing dimensions ODxH	OD 66 X H 109/69	
Electrical connection	Brad-Harrison male socket, 5-pin (order cable type 4930E separately)	
Electrical Data		
Operating voltage	90 - 250 VAC/DC	
Power consumption	-	
Switching current	≤ 5 A (120 VAC), ≤ 3A (250 VAC), max. 5A 150W at VDC	
Initial operation	approx. 10s after connection of power	
Electrical output	Relay with potential contact	
Flow < set-point	.80	.81
- LED, green	off	off
- Output relay	activated	not activated

¹⁾ data relate to water ²⁾ calibrated with insulation oil type "Shell Diala"

flow-captor 412x.8xM S140

Anschlussdiagramm
Connection diagram

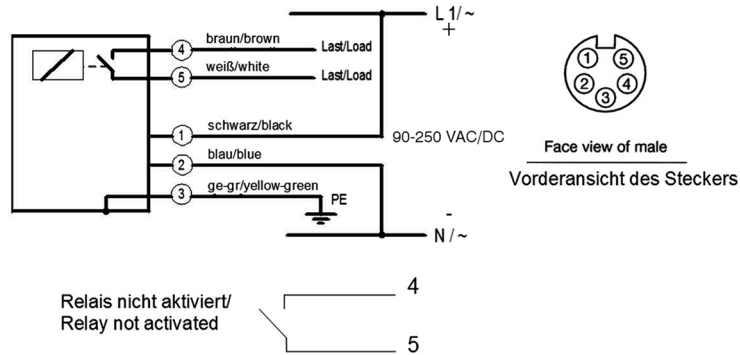

Gehäuseabmessungen
Dimensions

